

## iDS-7216HQHI-M1/XT 16-ch 1080P 1U H.265 AcuSense DVR

### Key Feature

- 16 channels and 1 HDD 1U AcuSense DVR
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Efficient H.265 pro+ compression technology
- Up to 3K/ 5 MPLite @ 12 fps encoding ability
- Up to 24 channels IP camera inputs, each channel up to 6MP
- Up to 24 \*1080P@30 decoding ability
- Up to 16 channels (analog channel) Motion Detection 2.0
- Up to 8 channels (advanced model, analog channel) Perimeter Protection
- Up to 4 channels (advanced model, analog channel) human face recognition



### Compression and Recording

- H.265 Pro+ can be enabled to improve encoding efficiency and reduce data storage costs
- Recording at up to 8 MP resolution

### Smart Function

- Up to 16 channels (analog channel) Motion Detection 2.0
- Up to 8 channels (advanced model, analog channel) Perimeter Protection
- Up to 4 channels (advanced model, analog channel) human face recognition
- Support smart playback to enhance playback efficiency

### Network & Ethernet Access

- Support Hik-Connect & DDNS (Dynamic Domain Name System)
- Output bandwidth limit configurable


## ▪ Specification

<b>Facial Recognition</b>	
Face Picture Comparison	Face picture comparison, face picture search (4-ch face picture comparison alarm for HD analog camera)
Face Picture Library	Up to 16 face picture libraries; HDD damage will not cause data loss in the face picture library, because the library has been backed up by HDD and flash.
<b>Motion Detection 2.0</b>	
Human/Vehicle Analysis	Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights; Quick search by object or event type is supported;
<b>Perimeter Protection</b>	
Human/Vehicle Analysis	Up to 8-ch (advanced model)
<b>Facial Detection</b>	
Facial Detection and Capture	Face picture detection, face picture search; 4-ch face picture capture
<b>Recording</b>	
Video Compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Encoding Resolution	When 1080p Lite mode is not enabled: 3K lite/5 MP lite/4 MP lite/1080p/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode is enabled: 3K lite/5 MP lite/4 MP lite/1080p lite/720p lite/VGA/WD1/4CIF/CIF

<p>Frame Rate</p>	<p>Main stream:</p> <p>When 1080p Lite mode not enabled:</p> <p>For 3K stream access: 3K lite@12fps;4 MP lite@15fps/1080pLite@20fps;720p/WD1/4CIF/VGA/CIF@20fps</p> <p>For 5 MP stream access: 5 MP lite@12fps;4 MP lite@15fps/1080pLite@20fps;720p/WD1/4CIF/VGA/CIF@20fps</p> <p>For 4 MP stream access: 4 MP lite@15fps/1080pLite@25fps (P)/30fps (N) ;720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)</p> <p>For 1080p stream access: 1080p/720p@15fps; VGA/WD1/4CIF/CIF@25fps (P)/30fps (N)</p> <p>For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N)</p> <p>When 1080p Lite mode enabled:</p> <p>3K lite/5 MP lite@12fps;4 MP lite@15fps;1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N)</p> <p>Sub-stream:</p> <p>WD1/4CIF@12fps; CIF@25fps (P)/30fps (N)</p>
<p>Video Bitrate</p>	<p>32 Kbps to 6 Mbps</p>
<p>Dual-stream</p>	<p>Support</p>
<p>Stream Type</p>	<p>Video, Video &amp; Audio</p>
<p>Audio Compression</p>	<p>G.711u</p>
<p>Audio Bitrate</p>	<p>64 Kbps</p>
<p><b>Video and Audio</b></p>	
<p>IP Video Input</p>	<p>8-ch (up to 24-ch), each up to 4 Mbps</p> <p>Up to 6 MP resolution</p> <p>Support H.265+/H.265/H.264+/H.264 IP cameras</p>
<p>Analog Video Input</p>	<p>16-ch</p> <p>BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection</p>
<p>HDTV Input</p>	<p>3K(2960 × 1665)@20 fps, 5 MP(2560 × 1944)@20 fps, 4 MP(2560 × 1440)@30 fps, 4 MP(2560 × 1440)@25 fps,1080p@30 fps, 1080p@25 fps,720p@30 fps, 720p@25 fps</p>
<p>AHD Input</p>	<p>5 MP(2560 × 1944)@20 fps, 4 MP(2560 × 1440)@30 fps, 4 MP(2560 × 1440)@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps</p>
<p>HDCVI Input</p>	<p>5MP(2880 × 1620)@25 fps, 5 MP(2592 × 1944)@20 fps, 4 MP(2560 × 1440)@30 fps, 4 MP(2560 × 1440)@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps</p>
<p>CVBS Input</p>	<p>PAL/NTSC</p>
<p>CVBS Output</p>	<p>1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480</p>


HDMI Output	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, HDMI/VGA simultaneous output
VGA Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, HDMI/VGA simultaneous output
Audio Input	1-ch (up to 16-ch is optional), RCA (2.0 Vp-p, 1 K $\Omega$ ) 16-ch via coaxial cable
Audio Output	1-ch, RCA (Linear, 1 K $\Omega$ )
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 K $\Omega$ ) (using the first audio input)
Synchronous playback	16-ch
<b>Decoding</b>	
Decoding Capability	up to 24-ch 1080P@30fps
<b>Network</b>	
Remote Connection	128
Total Bandwidth	256 Mbps
Network Protocol	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, ISUP
Network Interface	1, RJ45 10/100/1000 Mbps self-adaptive Ethernet interface
<b>Auxiliary Interface</b>	
SATA	1 SATA interface, up to 12 TB capacity for each disk
Serial Interface	RS-485 (half-duplex)
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 2 × USB 3.0
Alarm In/Out	N/A (optional to support)
<b>General</b>	
Power Supply	12 VDC, 2 A
Consumption	≤ 24 W
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Dimension (W × D × H)	320 × 240 × 48 mm (12.6 × 9.4 × 1.9 inch)
Weight	≤ 2 kg (4.4 lb)

Dimension

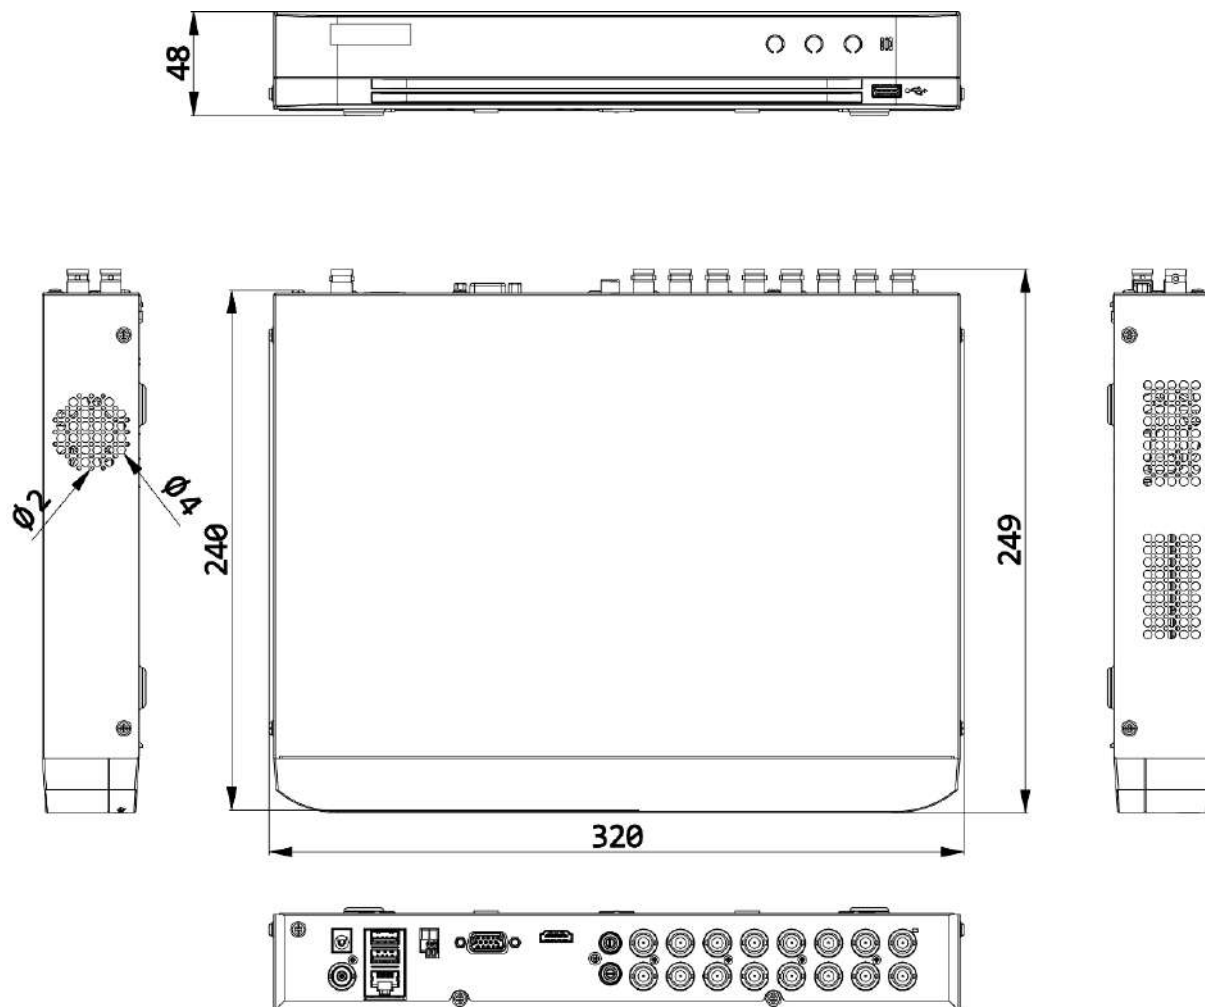

scale/1:1;Unit/mm

## Physical Interface

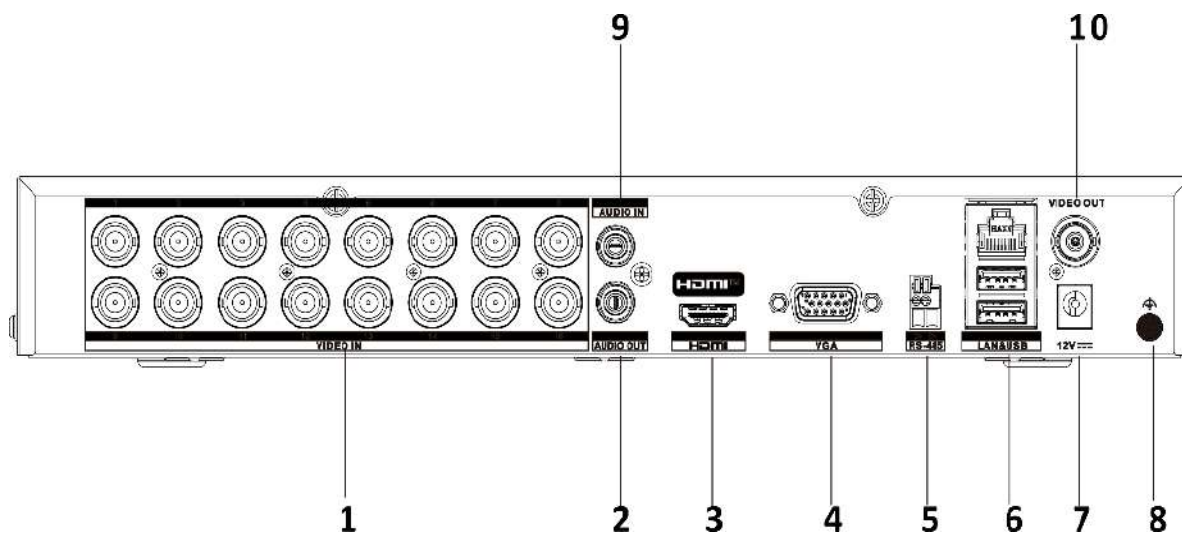

No.	Description	No.	Description
1	Video in	6	LAN network interface and USB interface
2	Audio out	7	12 VDC power input
3	HDMI interface	8	GND
4	VGA interface	9	Audio in
5	RS-485 interface	10	Video out

## Available Model

iDS-7216HQHI-M1/XT

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T: +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

