

# RG-RAP1260

## Reyee Wi-Fi 6 AX3000 Dual-Band Wall Plate Access Point

DATASHEET



### Highlights

- Dual-radio performance, gigabit wireless wall-mounted AP
- Better experience with MU-MIMO under 802.11ax
- Multi-Color changable Cases
- Easy installation, worldwide compatible
- Capable of Reyee Mesh and 802.11K/V/R
- Powerful Standalone Portal via Ruijie Cloud

## Highlight Features

### Wi-Fi 6 AX3000 Dual-Band Multi-Port Wall AP

RG-RAP1260



PoE



2.4G/5G Dual-band

3000 Mbps

3000Mbps Internet Rate

110 people

110 Recommended Concurrent Users

### More Than Wi-Fi, 4 Ports Meet Multi-Task Scenarios



### Latency on Video Conference? RAP1260 Makes Terminal Access Rate Up To 900Mbps.



00:09



7


## Highlight Features

### Smart AI Roaming Enhances Wireless Experience Anywhere You Go



### Cloud, Make Your Business Easy

- Self-organizing network
- Cloud portal authentication
- Remote monitoring and maintenance
- Upgrade firmware via Cloud
- APP library dynamically update

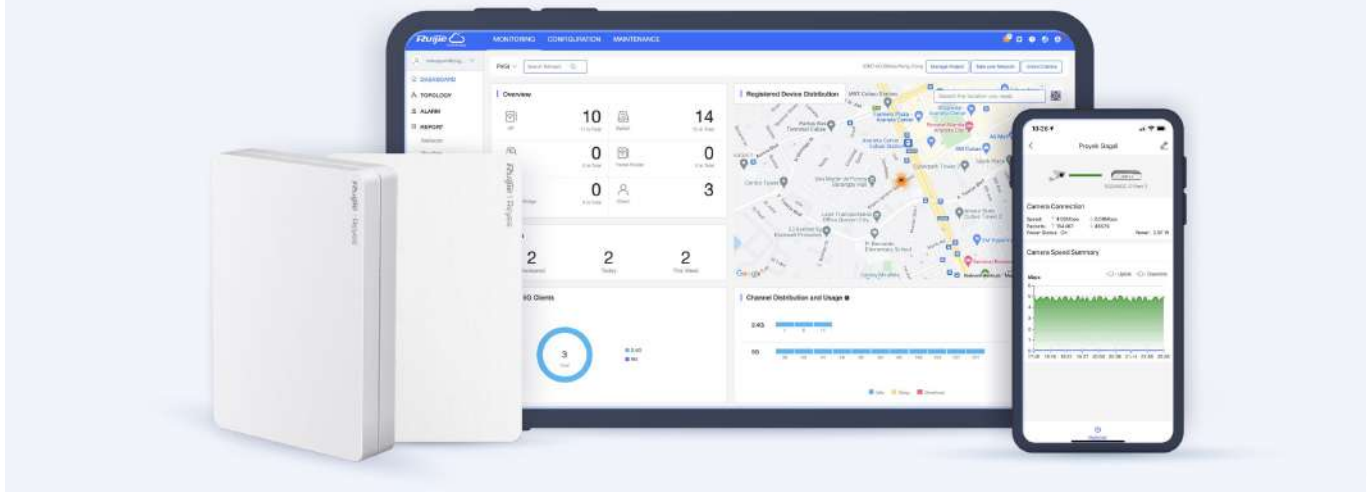

# Specifications

## Basic Features

Wi-Fi Standards	802.11a/n/ac/ax 802.11b/g/n/ax
MIMO	2.4 GHz, 2x2, MU-MIMO 5 GHz, 2x2, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 574 Mbps 5 GHz: 2402 Mbps
Number of Antennas	5
Antenna Type	Built-in omnidirectional antennas
Antenna Gain	2.4 GHz: 3 dBi 5 GHz: 5 dBi
Transmit Power	<p>Frequency bands using and the max EIRP:            Note: Country specific restrictions apply</p> <p><b>European Union &amp; United Kingdom</b>            2400-2483.5 MHz, EIRP ≤ 20 dBm            5150-5350 MHz, EIRP ≤ 23 dBm            5470-5725 MHz, EIRP ≤ 30 dBm</p> <p><b>United States:</b>            2400-2483.5 MHz, max output power ≤ 30 dBm &amp; EIRP ≤ 36 dBm            5150-5250 MHz, max output power ≤ 30 dBm &amp; EIRP ≤ 36 dBm            5250-5350 MHz, max output power &lt; 24 dBm &amp; EIRP ≤ 30 dBm            5470-5725 MHz, max output power &lt; 24 dBm &amp; EIRP ≤ 30 dBm            5725-5825 MHz, max output power ≤ 30 dBm &amp; EIRP ≤ 36 dBm</p> <p><b>Myanmar :</b>            2400-2483.5 MHz, EIRP ≤ 23 dBm            5725-5825 MHz, EIRP ≤ 30 dBm</p> <p><b>Thailand:</b>            2400-2483.5 MHz, EIRP ≤ 20 dBm            5150-5350 MHz, EIRP ≤ 23 dBm            5470-5725 MHz, EIRP ≤ 30 dBm            5725-5825 MHz, EIRP ≤ 30 dBm</p> <p><b>Indonesia:</b>            2400-2483.5 MHz, EIRP ≤ 27 dBm            5150-5350 MHz, EIRP ≤ 23 dBm            5725-5825 MHz, EIRP ≤ 23 dBm</p> <p><b>Egypt:</b>            2400-2483.5 MHz, EIRP ≤ 20 dBm            5150-5350 MHz, EIRP ≤ 23 dBm</p>
Fixed Ports	1 x 10/100/1000Base-T Ethernet uplink port 4 x 10/100/1000Base-T Ethernet downlink ports 1 x Reset hole
Max. Number of Concurrent STAs	512

# Specifications

## Software Features

Recommended Number of Concurrent STAs 110

Max. Number of SSIDs 8

Supported Frequency Bands 802.11b/g/n/ax: 2.400 GHz to 2.483 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz (country-specific restrictions apply)

### WLAN Basic Features

Power Adjustment ✓

Channel Bandwidth 2.4 GHz: Auto/20 MHz/40 MHz 5 GHz: Auto/20 MHz/40 MHz/80 MHz/160 MHz

Roaming Layer 2 roaming Layer 3 roaming 802.11k/v/r roaming

OFDMA ✓

Beamforming ✓

Target Wake Time (TWT)\* ✓

Wi-Fi Multimedia (WMM) ✓

Radar Signal Detection and Frequency Hopping (DFS) ✓

### WLAN Security

Wi-Fi Password 16 characters

Security Mode WAP-PSK,WAP2-PSK,WPA-WAP2-PSK

Blocklist and Allowlist ✓

### Enhanced User Experience

Wi-Fi Optimization ✓

STA Limiting ✓

Removing Low-RSSI STAs ✓

Removing Low-RSSI STAs ✓

Syslog Recording Why Users Lose Connection ✓

# Specifications

## System

Auto Channel and Power Adjustment on Cloud ✓

RSSI Threshold for STA Access ✓

Load Balancing ✓

## Networks

Network Access Mode PPPoE Client DHCP Client Static IP

Avoidance of WAN IP Address Conflicts ✓

VLAN Port-based VLAN VLAN over 802.1Q TV projection screen

DHCP Server ✓

Cloud Management ✓

App Management ✓

App Upgrade ✓

App Restart ✓

Scheduled Restart ✓

Default Access/Password 10.44.77.254  
The factory status password: admin

Local Upgrade ✓

Online Upgrade ✓

Backup ✓

Factory Reset ✓

Language Chinese English

System Log ✓

Diagnostics ✓

Network Check ✓

## Specifications

### Hardware Features

LED	1 x System status LED
Reset Hole	1 x Reset hole
Dimensions (W x D x H)	124 mm x 86 mm x 24 mm (4.88 in. x 3.89 in. x 0.94 in.)
Weight	0.5 kg (1.10 lbs)
Installation Method	In-wall mounting
Mounting Bracket Dimensions (W x D x H)	122 mm x 80 mm x 3.8 mm (4.80 in. x 3.15 in. x 0.15 in.)
Mounting Hole Pattern	Hole pattern 83.5 mm x 60 mm (3.29 in. x 2.36 in.)
Mounting Hole Diameter	2.25 mm (0.09 in.)
Pole Diameter	N/A
Power Supply	IEEE 802.3af/at PoE
Max. Power Consumption	12 W
PoE Power Budget	N/A

### Environment

Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-40°C to +70°C (-40°F to +158°F)
Operating Humidity	5% to 95% RH (non-condensing)
Storage Humidity	5% to 95% RH (non-condensing)
Ingress Protection Rating (IP Rating)	IP41
Surge Protection	+/-4kV
MTBF	400,000 hours

# Package Contents

<b>Package Information</b>	<b>RG-RAP1260</b>
RG-RAP1260 Access Point	<b>1</b>
Power Adapter	<b>N/A</b>
User Manual	<b>1</b>
Cat5e UTP Cable	<b>N/A</b>
Mounting Bracket	<b>1</b>
Rack-mount Bracket	<b>N/A</b>
Screw	<b>4</b>
Certification	<b>CE and CB</b>
Warranty Card	<b>1</b>



*Ruijie* | RCYCC

 **R**edefine your **e**asy network

---

Copyright ©2000-2023 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

#### Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd.  
Building 19, Juyuanzhou Industrial Park, No.618 Jinshan  
Road, Cangshan District, Fuzhou, Fujian, China  
Website: <https://www.ruijienetworks.com>