

High Definition Video Decoder

DC5504/06/10-E-V2



Key Features


- Provide 4/6/10 HDMI output interfaces
- Provide 2 HDMI input interface
- Up to 3840x2160@60Hz via HDMI output interfaces
- Up to 1920x1080@60Hz via HDMI input interfaces
- Up to decoding at 8MP resolution
- DC5504-E-V2 Support 4-ch@4K/16-ch@1080P/36-ch@720P/64-ch@D1 decoding ability
- DC5506-E-V2 Support 6-ch@4K/24-ch@1080P/54-ch@720P/96-ch@D1 decoding ability
- DC5510-E-V2 Support 10-ch@4K/40-ch@1080P/90-ch@720P/160-ch@D1 decoding ability
- Decode video stream in H.265/ H.264/ MPEG4/ MPEG2/ MJPEG
- 1/2/3/4/6/7/9/16 display split
- Standard ONVIF video stream supported
- Support multicast
- Support up to 4/6/10 video-wall display units

Specifications


Model	DC5504-E-V2	DC5506-E-V2	DC5510-E-V2
Video Output			
Output channel	4	6	10
HDMI output	3840x2160(4K)@60HZ、3840x2160(4K)@30HZ、1920x1080(1080P)@60HZ、1600x1200(UXGA)@60HZ、1440x900(WXGA+)@60HZ、1280x1024(SXGA)@60HZ、1280x720(720P)@60HZ、1024x768(XGA)@60HZ		
Video input			
Input channel	2*HDMI (video only)		
HDMI input	1920x1080(1080P)@60HZ、1920x1080(1080P)@50HZ、1600x1200(UXGA)@60HZ、1440x900(WXGA)@60HZ、1280x1024(SXGA)@60HZ、1280x720(720P)@60HZ、1280x720(720P)@50HZ、1024x768(XGA)@60HZ		
Video Decoding			
Video Stream Format	H.265, H.264, MPEG4, MPEG2, MJPEG		
Decoding Capability	4x3840x2160@30、16x1080P@30、36x720P@30、64xD1	6x3840x2160@30、24x1080P@30、54x720P@30、96xD1	10x3840x2160@30、40x1080P@30、90x720P@30、160xD1
Display split	1/2/3/4/6/7/9/16		
External Interface			
Audio Input	2-ch (Reservation)		
Audio Output	1-ch (3.5mm)		
Alarm Input	6(Reservation)		
Alarm Output	3(Reservation)		
USB Interface	1*USB 3.0		
Serial Interface	1*RS-232, 1*RS485		
Network Interface	1*RJ-45, 10M/100M/1000M adaptive Ethernet Interfaces		
General			
Dimensions(W×H×D)(mm)	440mm × 339 mm × 44mm		
Weight	3.28kg	3.30kg	3.37kg
Working Temperature	-10~55°C		
Working Humidity	10% ~ 90%(No-condensing)		
Power Supply	100V ~ 240V AC; 50Hz/60Hz		
Consumption	20W	24W	31W

Dimensions

DC5504/6/10-E-V2

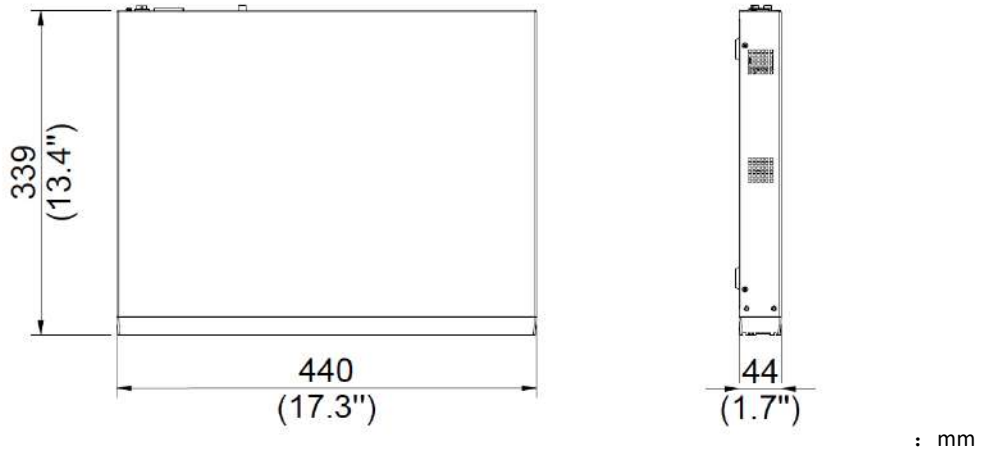

Rear Panel

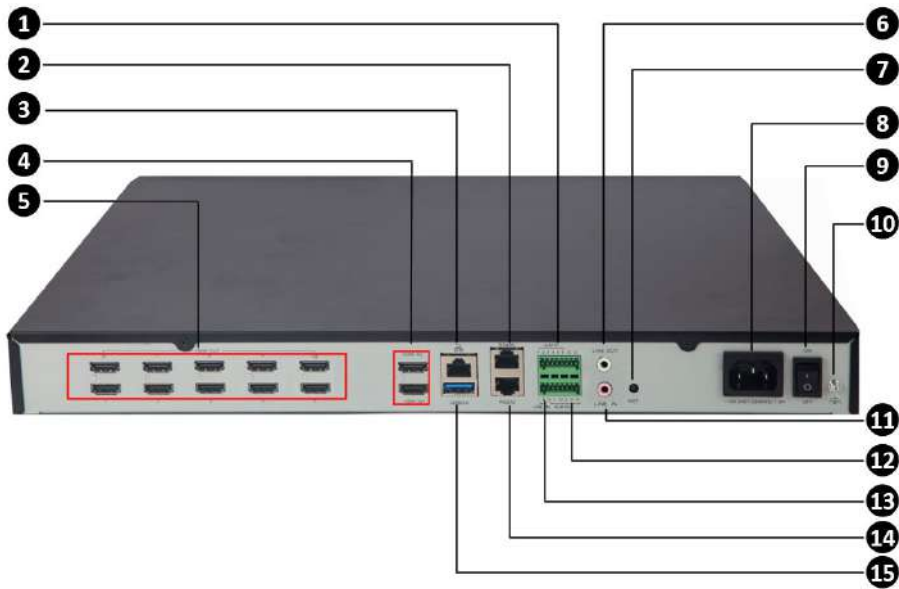

1	ALM IN(Reservation)
2	RS 485
3	Network Interface
4	HDMI IN
5	HDMI OUT
6	LINE OUT
7	RST

8	AC Power Input
9	Power Switch
10	Grounding
11	LINE IN(Reservation)
12	ALM OUT(Reservation)
13	LINE IN(Reservation)
14	RS 232
15	USB 3.0

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.